




PUMP SPECIFICATION

010M - STD - FL



10 m3 / Day / 100 RPM (63 bbl / Day / 100 RPM)							
Available Models		010 M 0900	10 M 1200	010 M 1800	010 M 2400	010 M 2700	
		Geometry: Single Lobe		Operating Speed: 50 - 500 RPM		Free Gas Volume Fraction: 40% continuous	
		Swept Rotor Angle: 33		Intake cavity area - mm ² (in ²): 684 (1.06)			
Pump Lift H2O - m (ft)		900 (2952)	1200 (3936)	1800 (5904)	2400 (7872)	2700 (8856)	
Rated Pressure kPa (psi)		9000 (1305)	12000 (1740)	18000 (2611)	24000 (3481)	27000 (3916)	
Rated Torque N-m (ft-lbs)		114 (84)	152 (112)	230 (169)	306 (225)	343 (253)	
ROTOR	Rotor Top Connection mm (in)	7/8" API Pin					
	Rotor Head Diameter mm (in)	41.30 (1.625)					
	Overall Rotor Length m (in)	2.46 (97)	3.13 (123)	4.42 (174)	5.72 (225)	6.38 (251)	
	Weight kg (lbs)	20 (44)	27 (59)	40 (88)	53 (117)	60 (132)	
	Nominal Rotor Drift OD mm (in)	48.17 (1.896)					
STATOR - STD	Stator OD mm (in)	90.0 (3.54)					
	Collar OD (mm)	97.64 (3.844)					
	Connection Discharge - Intake	3 1/2" NUE Pin - 3 1/2" NUE Pin					
	Stator Overall Length w TB m (in)	2.42 (95)	3.08 (121)	4.38 (172)	5.67 (223)	6.38 (251)	
	Weight kg (lbs)	38 (84)	51 (112)	76 (167)	101 (222)	114 (251)	
STATOR - FL	Distance TB to Elastomer mm (in)	300 (12)					
	Tagbar/sub bottom connection	2 7/8" EUE Pin					
	Stator OD mm (in)	FL - 90 (3.54)					
	Collar OD mm (in)	FL - 90 (3.54)					
	Connection Discharge - Intake	2 7/8" EUE Box - 2 7/8" EUE Box					
Stator Overall Length w TB m (in)	2.62 (103)	3.28 (129)	4.58 (180)	5.87 (231)	6.54 (257)		
Weight kg (lbs)	38 (84)	51 (112)	76 (167)	101 (222)	114 (251)		
Distance TB to Elastomer mm (in)	300 (12)						
Tagbar/sub bottom connection	2 7/8" EUE Pin						
NOTE							

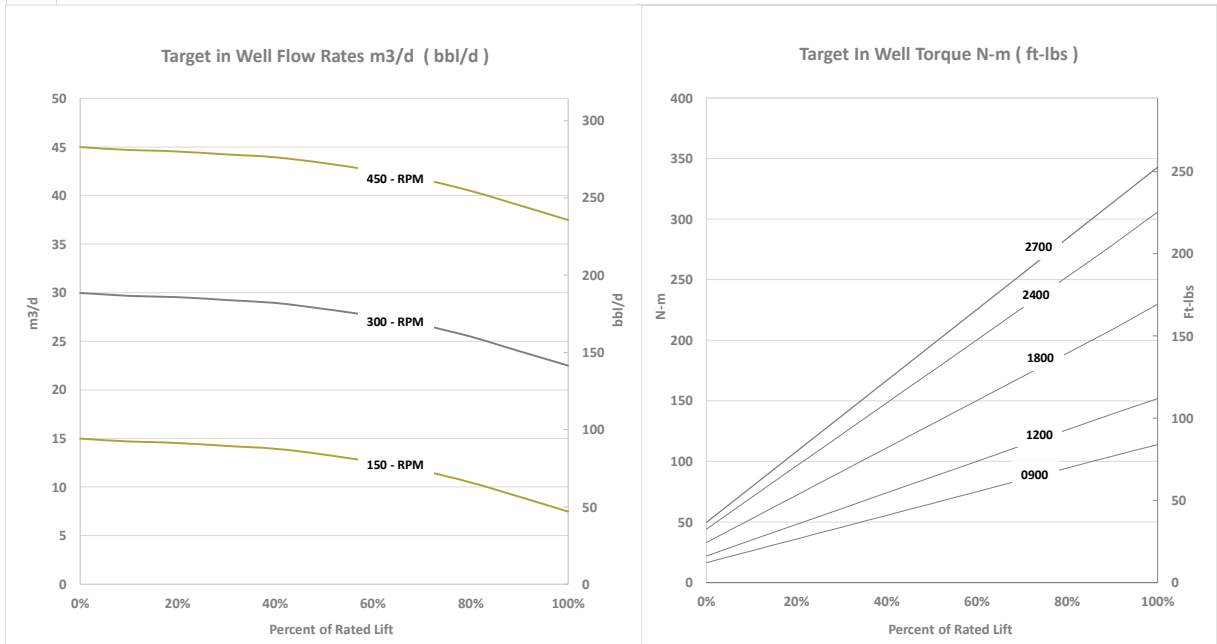

MANTL reserves the right to change information contained in this document without prior notice. Contact a MANTL representative for additional information. 5/15/2020

FROM THE GROUND UP