




PUMP SPECIFICATION

123M - STD - FLOT - SHOT




123 m3 / Day / 100 RPM (774 bbl / Day / 100 RPM)					
Available Models		123 M 0600	123 M 0900	123 M 1200	123 M 1500
Geometry: Single Lobe Operating Speed: 50 - 500 RPM Free Gas Volume Fraction: 40% continuous					
Swept Rotor Angle: 69		Orbit Helix - mm (in): 76.00 (2.992)		Intake cavity area - mm ² (in ²): 1442 (2.24)	
Pump Lift H ₂ O - m (ft)		600 (1968)	900 (2952)	1200 (3936)	1500 (4920)
Rated Pressure kPa (psi)		6000 (870)	9000 (1305)	12000 (1740)	15000 (2175)
Rated Torque N-m (ft-lbs)		938 (691)	1406 (1036)	1876 (1382)	2343 (1727)
ROTOR	Rotor Top Connection mm (in)	1" API Pin			
	Rotor Head Diameter mm (in)	50.80 (2.00)			
	Overall Rotor Length m (in)	6.11 (240)	8.91 (351)	11.71 (461)	14.51 (571)
	Weight kg (lbs)	57 (125)	84 (185)	110 (242)	136 (299)
Nominal Rotor Drift OD mm (in)		57.82 (2.276)			
STATOR - STD	Stator OD mm (in)	103.0 (4.055)			
	Collar OD (mm)	120.65 (4.75)			
	Connection Discharge - Intake	4" NUE Pin - 4" NUE Pin			
	Stator Overall Length w TB m (in)	6.06 (238)	8.86 (349)	11.66 (459)	14.46 (569)
	Weight kg (lbs)	139 (306)	209 (460)	278 (612)	348 (766)
	Distance TB to Elastomer mm (in)	300 (12)			
Tagbar/sub bottom connection		3 1/2" EUE Pin			
STATOR - FLOT - SHOT	Stator OD mm (in)	FLOT - 106 (4.173) // SHOT 99 (3.898)			
	Collar OD mm (in)	FLOT - 106 (4.173) // SHOT 99 (3.898)			
	Connection Discharge - Intake	FLOT - 3 1/2" EUE Box // SHOT - 2 7/8" EUE Box			
	Stator Overall Length w TB m (in)	6.06 (238)	8.86 (349)	11.66 (459)	14.46 (569)
	Weight kg (lbs)	139 (306)	209 (460)	278 (612)	348 (766)
	Distance TB to Elastomer mm (in)	300 (12)			
Tagbar/sub bottom connection		FLOT - 3 1/2" EUE Pin // SHOT - 2 7/8" EUE Pin			
NOTE					

Target in Well Flow Rates m³/d (bbl/d)

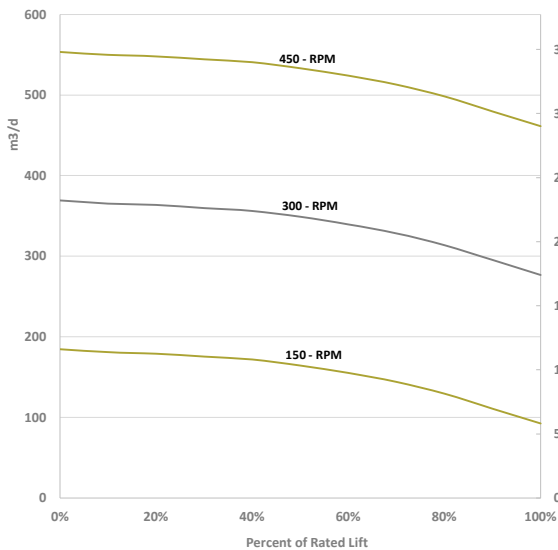

Target In Well Torque N-m (ft-lbs)

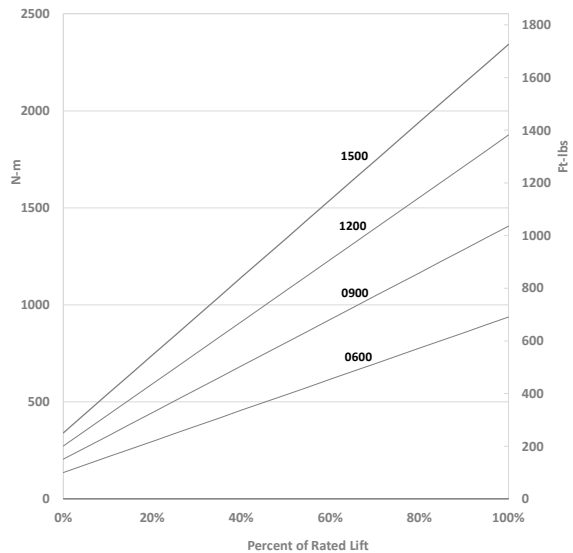

'CAUSE WE GIVE A \$#!T